




**DUMPS**

Manufactured using type 409 stainless steel. The DynoMax® Dumps feature ID sized inlets and outlets allowing for easy slip-fit installation with no welding required. They are perfect for the DIY'er! The outlet block-off plate is a loose flange for improved clearance and fit. High quality extended length bolts are combined with hex nuts or wing nuts for ease of use.

- Fully welded
- Type 409 Stainless steel
- Aggressive tone
- All hardware and gaskets included



PART NO.	A	B	C	D	E
88339	2.25 ID	2.25 ID	3 OD	12	7.5
88340	2.5 ID	2.5 ID	3 OD	12	7.5
88341	3 ID	3 ID	3.5 OD	12	9.5

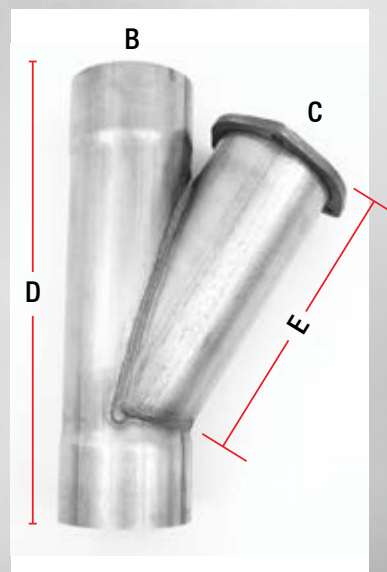

All measurements are in inches.

**O<sub>2</sub> FITTING & PLUG**

PART NO.	DESCRIPTION
88103	18mm x 1.5-in. O <sub>2</sub> Fitting (Fitting only)
35299	18mm x 1.5 O <sub>2</sub> Fitting Plug



88103



**35299 Plug**  
Used in fitting when oxygen sensor is not required

**DYNOMAX® HAS TAKEN THE GUESSWORK OUT OF FABRICATING AND CONVERTING A HEAVY-DUTY TRUCK EXHAUST SYSTEM.**

The DynoMax® Truck Staxx kit enables light-truck and diesel owners to convert their existing exhaust outlet using two upright stacks located behind the passenger compartment. Available in a 4-in. angled outlet.

DynoMax® Truck Staxx kit includes stacks reducers, elbows and hardware for a complete installation.

**KIT No. 89303**

PART NO.	QUANTITY	DESCRIPTION
29408	2	4-in. ID x 48-in. Angle-cut Stack
41630	2	4-in. ID / OD 90° Elbow
41988	2	4-in. OD x 3-in. ID x 6-in. Adapter
35357	2	Bracket, Frame Mount
35530	2	Bracket, Stack Mount
35776	2	4-in. U-Bolt Clamp, Chrome
35752	2	4-in. U-Bolt Clamp, Plain



**89303**  
Staxx Kit

All measurements are in inches.