






Installing a high performance exhaust system has never been easier. These new direct fit systems have been designed to follow OEM routing and mounting points exactly. You don't have to cut or weld brackets and pipes to muffler bodies.

Now you can "bolt-on" a complete DynoMax high performance system — featuring the power boosting Super Turbo Muffler.

CHEVROLET/GMC C/K SERIES PICKUP

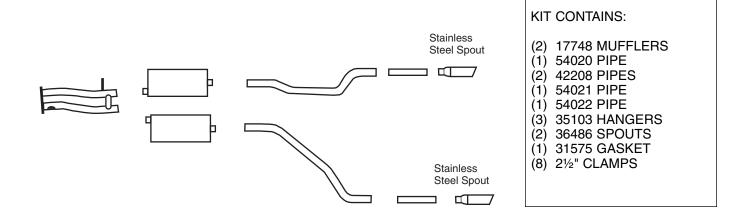

APPLICATION DATA

| Year | Cyl. | Model & Engine | Int. Pipe | Muffler | Ext. Pipe | Tail Pipe | Clamps |
|---------|------|---|-----------|--------------------------|--------------------------|--|----------|
| 1996-97 | 8 | C/K 1500/2500 w/5.7L, 141.5" WB (Under 8600 GVW) | 54020 | (RH) 17748 (LH) 17748 | (RH) 42208 (LH) 42208 | (RH) 54021 ¹ (LH) 54022 ² | 21⁄2 (8) |

1 Install 35103 Hanger at Inlet and Outlet.

2 Install 35103 Hanger at Outlet.