






Installing a high performance exhaust system has never been easier. These new direct fit systems have been designed to follow OEM routing and mounting points exactly. You don't have to cut or weld brackets and pipes to muffler bodies.

Now you can "bolt-on" a complete DynoMax high performance system — featuring the power boosting Super Turbo Muffler.

## CHEVROLET/GMC C/K SERIES

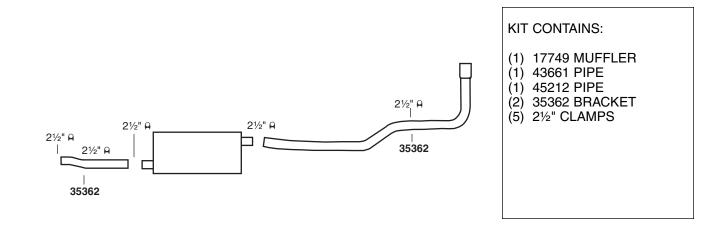

## **APPLICATION DATA**

## **C** Series

Year	Cyl.	Model & Engine	Int. Pipe	Muffler	Tail Pipe	Clamps
1988-93	6	C1500/2500 w/4.3L (262)	43661#	17749	45212†	2½ (5)
1988-93	8	C1500/2500 w/5.0L (305)	43661#	17749	45212†	21⁄2 (5)

## **K** Series

Year	Cyl.	Model & Engine	Int. Pipe	Muffler	Tail Pipe	Clamps
1988-93	6	K1500/2500 w/4.3L (262)	43661#	17749	45212†	21⁄2 (5)
1988-93	8	K1500/2500 w/5.0L (305)	43661#	17749	45212†	21⁄2 (5)

Cut 5" off Inlet end for 117" WB.
# Cut 9" off Outlet end for 117" WB.